AS AirScreen Door Curtain
(AS1200E 6kW unit shown here)

Top: Overall view with contrasting grilles
Above left: Detail of wire mesh return air grille
Above right: Detail of linear discharge grille

envirotec
www.envirotec.co.uk

Notes

i) Unit finished in high quality powder-coat finish. Standard finish RAL 9010

ii) Return air and discharge available in contrasting colour to case

iii) Alternative mounting options available in line with client request

iv) Special sizes and outputs available up on request

v) Coil connections terminating inside casing

vi) Electric units fitted with high temperature cut-out

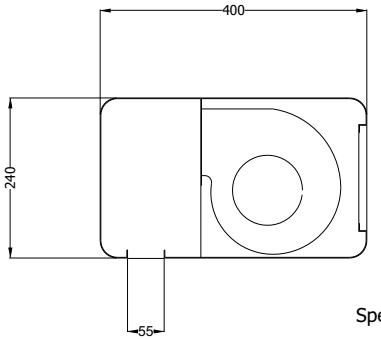

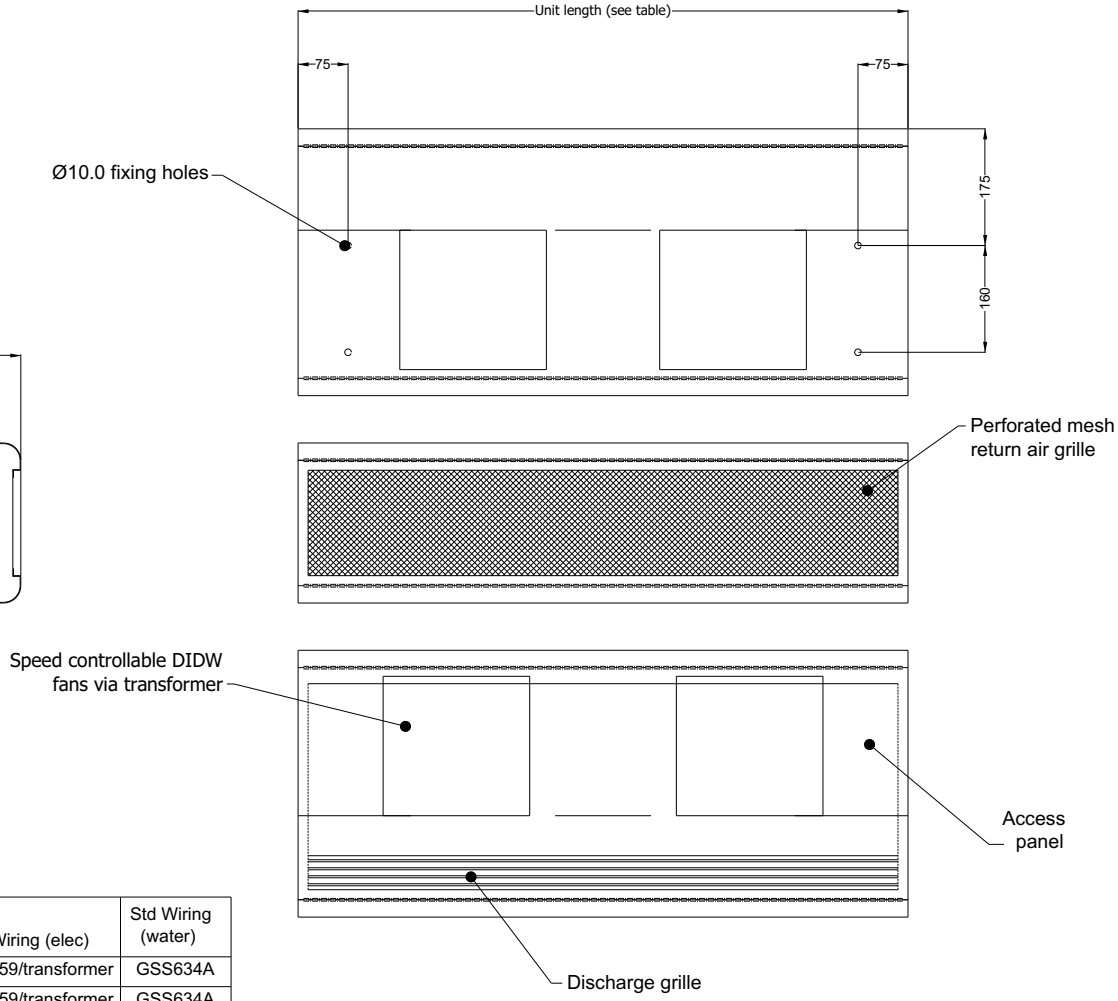

Unit ref	Length	Fan speeds	No of fans	Air volume	Heating duty electric (kW)	LPHW (kW)	Motor kW	Motor FLC	Weight	Std Wiring (elec)	Std Wiring (water)
AS915E & W	915	2	2	0.2 m³/s	6	6.2	0.36	1.5A	41kgs	GSS559/transformer	GSS634A
AS1220E & W	1220	2	3	0.3 m³/s	9	9.3	0.53	2.25A	53kgs	GSS559/transformer	GSS634A
AS1500E & W	1500	2	4	0.4 m³/s	12	12.34	0.72	3.0A	65kgs	GSS559/transformer	GSS634A
AS1800E & W	1800	2	5	0.5 m³/s	12, 18	15.5	0.89	3.75A	80kgs	GSS559/transformer	GSS634A
AS2100E & W	2100	2	6	0.6 m³/s	15, 18, 21	16.4	1.07	4.5A	95kgs	GSS559/transformer	GSS634A

* Unit weights are approximate
* GSS559/trans - 2 speed and 3 heat settings
* GSS634A - 2 speed on/off remote mounted switch

envirotec
Tel +44 (0)1494 525342
Fax +44 (0)1494 440889
www.envirotec.co.uk

NEW 'AS' AIR-SCREEN SURFACE MOUNTED DOORCURTAIN RANGE.

NOT TO SCALE	DRAWN: PB
DATE: 18.7.03	APPROVED: RY

DWG No. GA2226